

Hutch Flush Mount

700FMHTC_ 1.0



GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.


This product may be dimmed with a low-voltage electronic dimmer, TRIAC dimmer, or a 0-10V dimmer depending on the wiring configuration..

This instruction shows a typical installation.




CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.


Install the Fixture

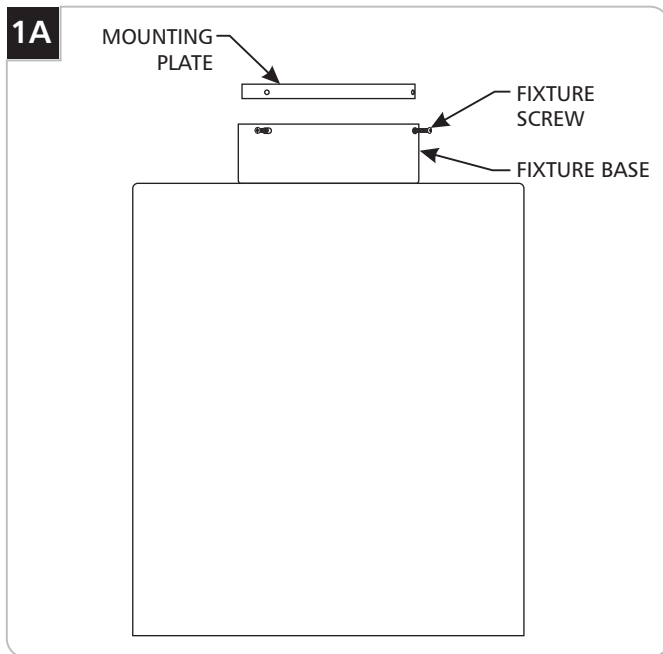

- 1 Remove the three fixture screws on the fixture base.
- 2 Separate the mounting plate from the fixture base.

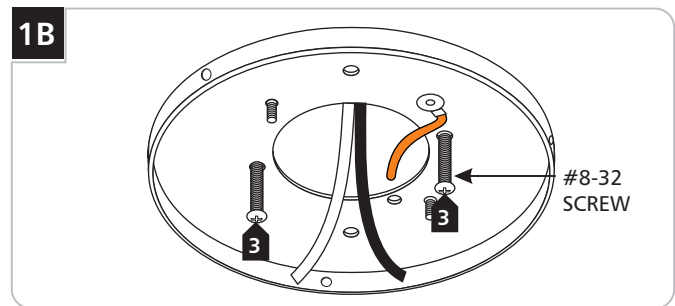

- 3 Mount the mounting plate to the electrical box with the two provided #8-32 screws.

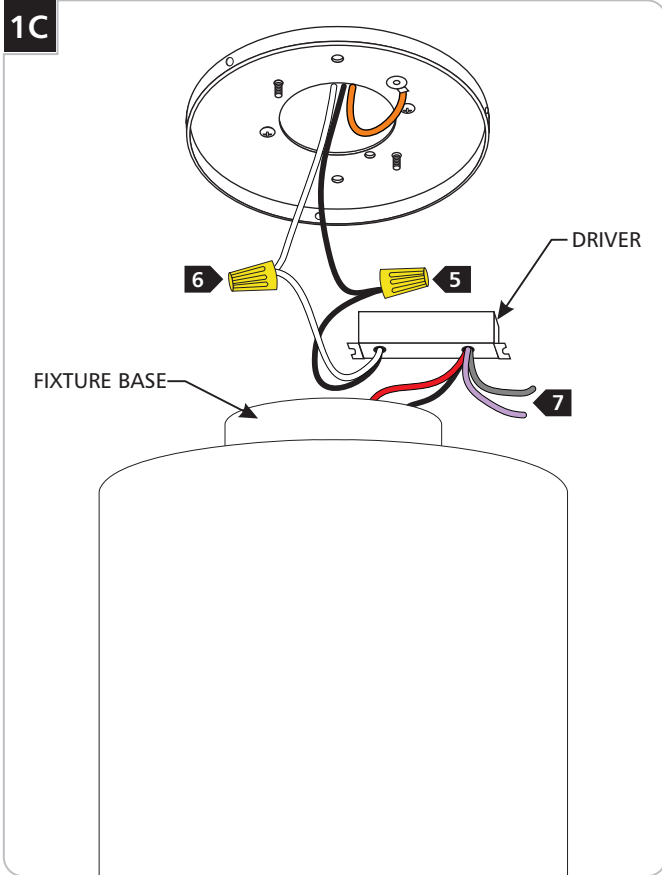

- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 7 If using the hi-output option, use the gray and purple dimming wires for 0-10v dimming application.
- 8 Neatly tuck the wires, wire nut connections and driver into the fixture base and reinstall the fixture to the mounting plate (reversal of step 1A).

NOTE: The purple and gray wires are only used for 0-10v dimming. 0-10v dimming is only available with the hi-output option. For all other applications, do not use the purple and grey wires.

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company