

Jaxon Wall

700WSJXN_ 1.0



GENERAL PRODUCT INFORMATION:



This product is suitable for damp locations.

This product can mount either to a 4" square electrical box with a round plaster ring or an octagon electrical box.

This product can be dimmed with a standard incandescent dimmer.


This instruction shows a typical installation.

CAUTION—RISK OF FIRE


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and DISCONNECT POWER TO THE ELECTRICAL BOX.




Install the Fixture Base

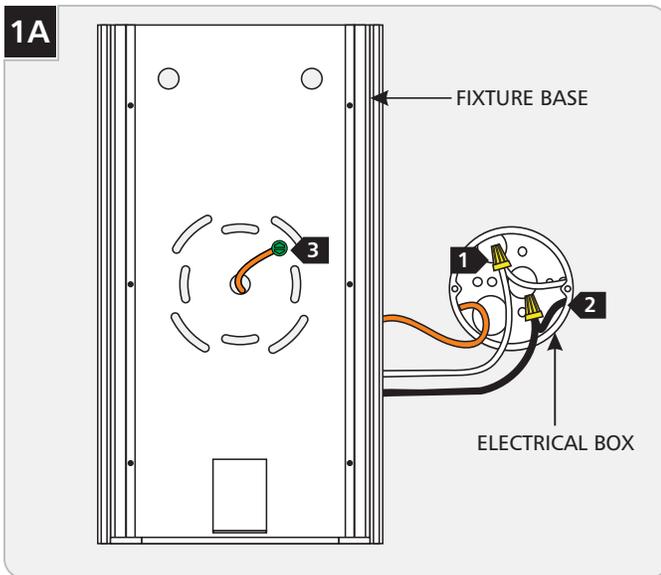


- 1 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 2 Connect the black fixture wire to the hot power line wire with a wire nut.
- 3 Connect the ground wire to a suitable ground according to local electrical codes.

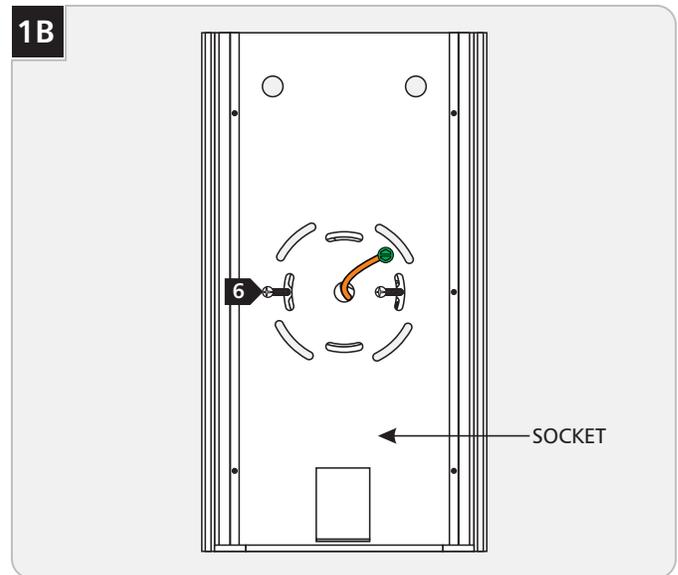

- 4 Place all wires and wire nut connections inside the electrical box.
- 5 Line up two mounting slots with the two electrical box holes. Make sure the lamp socket is at the bottom.
- 6 Secure the fixture base to the electrical box with the two #8-32 screws provided.

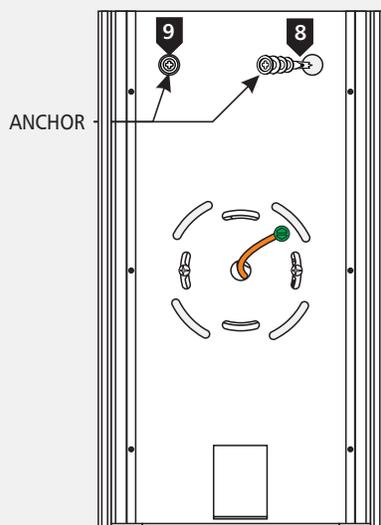1C


- 7** Verify that the fixture is level before continuing.
- 8** Line an anchor tip with the center of an anchor hole, and push the anchor into the wall up to the threads.
- 9** Screw the anchor in the rest of the way with a Phillips-head screwdriver.
- 10** Repeat for the other anchor hole.

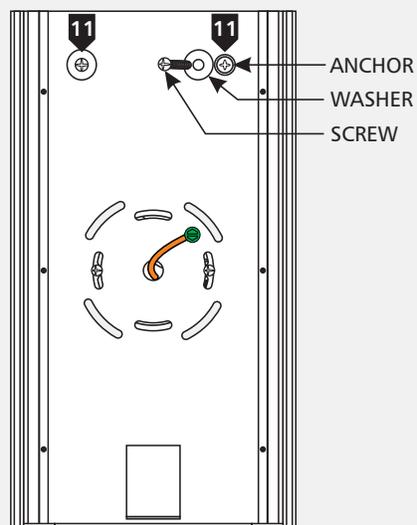1D

- 11** Slide a #8 screw through a washer, and screw it into an anchor to secure the fixture base to the wall. Repeat for the other anchor.

Install the Lamp and Shades

2A

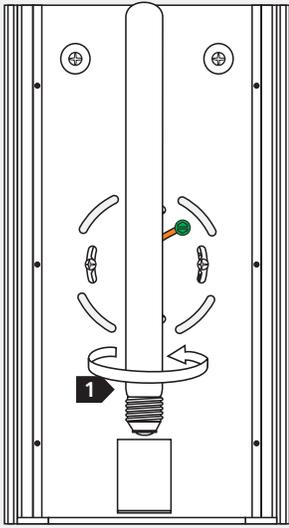


CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

Use **MAX 75 Watt** Type T8 medium base lamp.




1 Screw the lamp into the socket.

2B

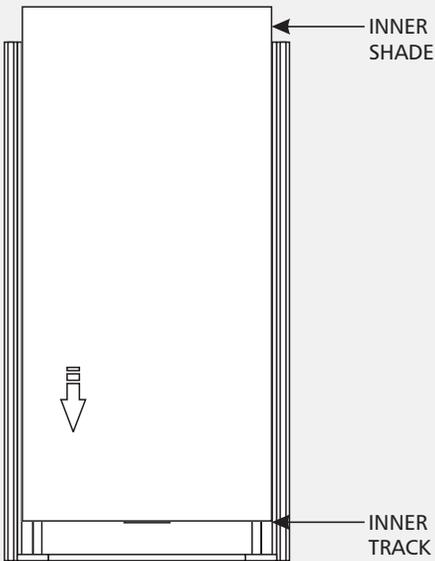

2 Gently slide the edges of the inner shade down the tracks in the fixture base until it rests against the end of the inner tracks.

2C

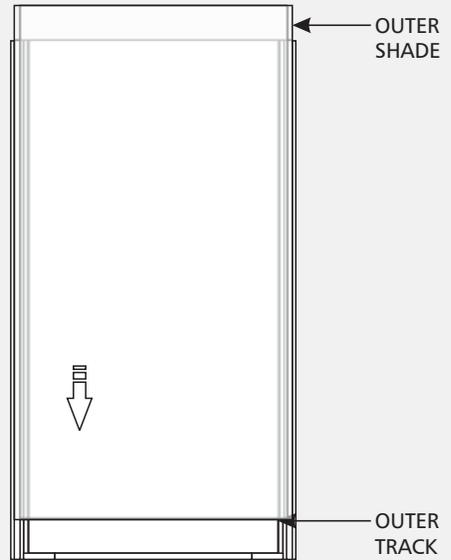

3 Gently slide the edges of the outer shade down the outer tracks in the fixture base until it rests against the end of the tracks.

NOTE: To re-lamp, simply reverse section 2 (Install the Lamp and Shade).

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2012 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company