


RL4143

ASSEMBLY & INSTALLATION GUIDE

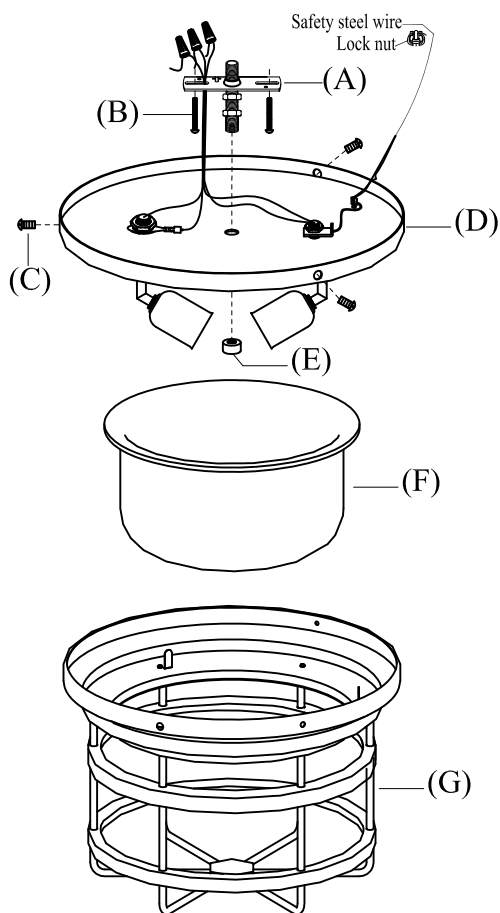

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Remove shade cage (G) from fixture base (D) by unscrewing base screws (C).
2. Remove mounting strap (A) from fixture base (D) by unscrewing cap nut (E).
3. Affix mounting strap (A) onto ceiling outlet box and secure with mounting screws (B).
4. Attach fixtures steel safety cable to structural member in the wall. (As shown in illustration A)
5. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
7. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
8. Attach fixture base (D) to affixed mounting strap (A), letting rod on mounting strap (A) pass through the holes on fixture base (D) and secure with cap nut (E).
9. Insert light bulbs into sockets.
10. Carefully insert glass shade (F) into shade cage (G).
11. Replace shade cage (G) with glass shade (F) to fixture base (D), secure with base screws (C).

R A L P H L A U R E N