

CHC1547


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

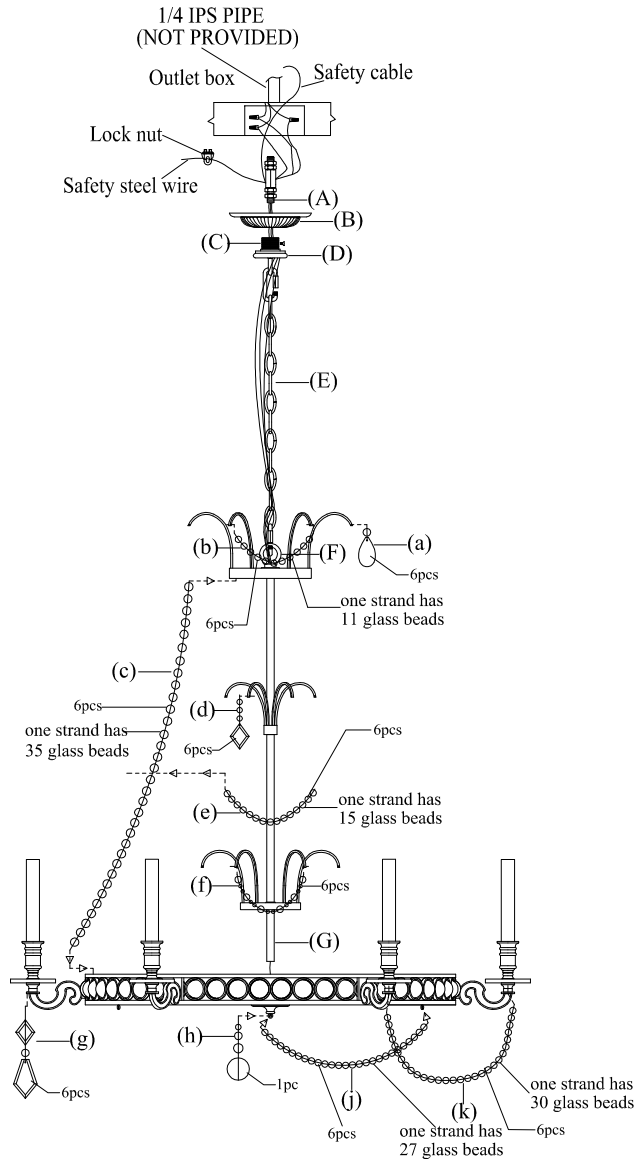

1. Screw pole assembly (G) onto center nipple on the candelabra assembly. Tighten by hand.
2. Attach chain (E) to top loop (F) on chandelier.
3. Feed wire through chain (E) and mounting loop (C). Slide canopy (B) on chain (E).
4. Insert top thread nipple (A) in mounting 1/4 IPS pipe. Attach chain mounting loop (C) to nipple (A).
5. Attach chain with fixture to chain mounting loop at desired height.
6. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See left illustration)
7. Attach the bare copper ground wire from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. It is imperative that the outlet box in your home be properly grounded.
8. Connect the neutral wire from the fixture (ridged molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
9. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
10. Slip canopy (B) to ceiling and secure with threaded canopy ring (D).
11. Hook (a) (d) (f) (g) and (h) to the corresponding holes as shown in the illustration.
12. Hook (c) to the holes as shown in the illustration. NOTE: There are 6 strands with 35 glass beads each.
13. Hook (e) to (c), attach it in between of the 16th and 17th glass beads as shown in the illustration.
14. Hook (i) (k) to the corresponding location as shown in the illustration.
15. Repeat the same procedures to install the rest glass bead strands.
16. Insert light bulbs into sockets.
17. Installation is complete. Test the fixture