


CHC2210

ASSEMBLY & INSTALLATION GUIDE

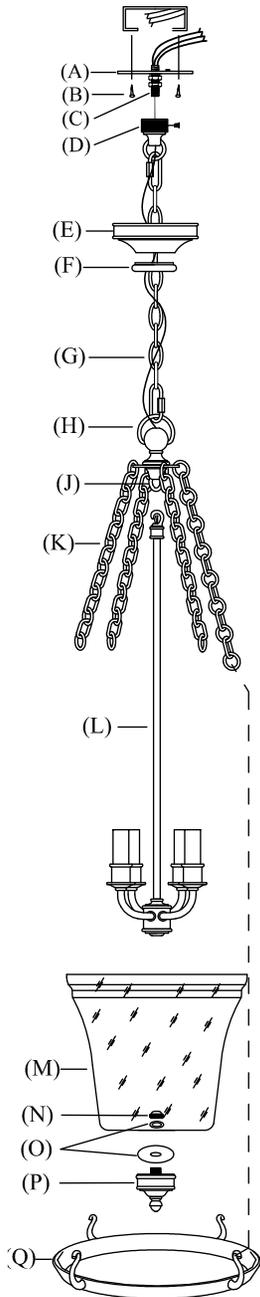

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Attach one end link of chain (G) to top loop (H) and another end link of chain (G) to chain mounting loop (D).
2. Hook the candelabra assembly (L) to the loop (J) and feed the wire through chain, mounting loop (D) and nipple.
3. Unscrew canopy ring (F) and slide canopy ring (F) and canopy (E) on chain.
4. Attach mounting strap (A) to ceiling outlet box using mounting screw provided.
5. Insert threaded nipple (C) in mounting strap (A). Using pliers, thread one of hex nut to nipple to secure.
6. Open the end link of chain (G) and screw mounting loop (D) to nipple. Close the chain to the mounting loop.
7. Attach the fixture grounding wire (silver or brass in color) and house grounding wire (usually green or copper) to the mounting strap with the green grounding screw. (L).
8. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together connector and wrap the connection with electrical with a plastic wire tape. Be sure no wire strands are exposed.
9. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each a plastic wire connector and wrap the connectio1 with electrical tape. Be sure that no wire strands are exposed.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
10. Tuck wire connections neatly into ceiling outlet box.
11. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).
12. Remove cap nut (N) from finial (P) and take out the small plastic washer (N).
13. Attach finial (P) to glass shade (M), letting nipple of finial (P) pass through the center hole of glass shade (M) and secure with small plastic washer (O) and cap nut.
14. Attach metal ring (Q) to glass shade (M), hook the ring to three end links of side chains (K).
15. Insert light bulbs into the sockets.