


# CHC3426

## ASSEMBLY & INSTALLATION GUIDE

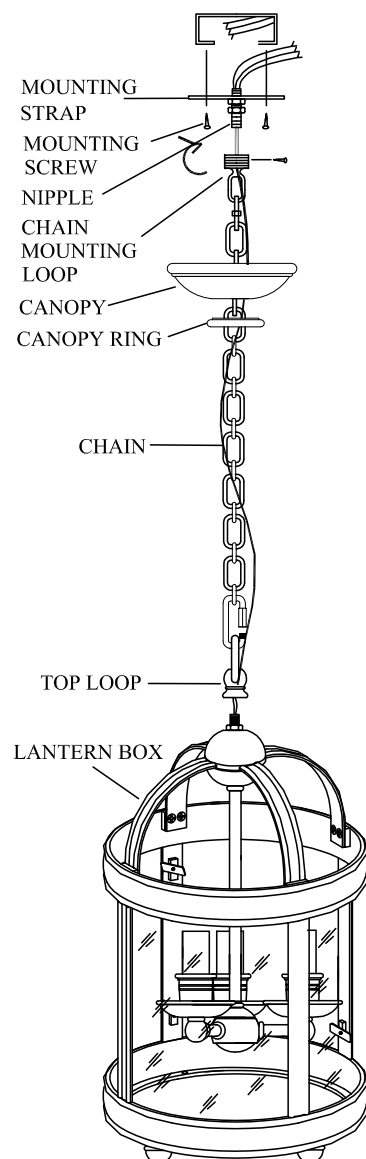

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Screw top loop onto top rod of lantern box and tighten the set screw at side of top loop until tight.
2. Feed wire through chain and mounting loop.
3. Unscrewing the canopy ring from chain mounting loop and slide canopy and canopy ring on chain.
4. Attach mounting strap to mounting outlet box and secure with mounting screws.
5. Insert top 1/2 inch nipple on mounting strap and 1/2 inch hex nut onto top of nipple until tight.
6. Attach chain mounting loop to bread nipple using the ceiling loop screw.
7. Attach chain with fixture to chain mounting loop at desired height.
8. Attach the ground wire (silver or brass in color) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape.
9. Be sure no wire strands are exposed. Be sure no wire strands are exposed.

IT IS IMPERATIVE THAT THE OUTLET BOX TO YOUR HOME BE PROPERLY GROUNDED.

10. Connect the neutral wire from the fixture (ridged molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure
11. no wire strands are exposed.
12. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

13. Tuck wire connection neatly into ceiling outlet box.
14. Slip canopy to ceiling and secure with 1/2 inch banded canopy ring. Insert light bulbs into the sockets.