


CHC3427

ASSEMBLY & INSTALLATION GUIDE

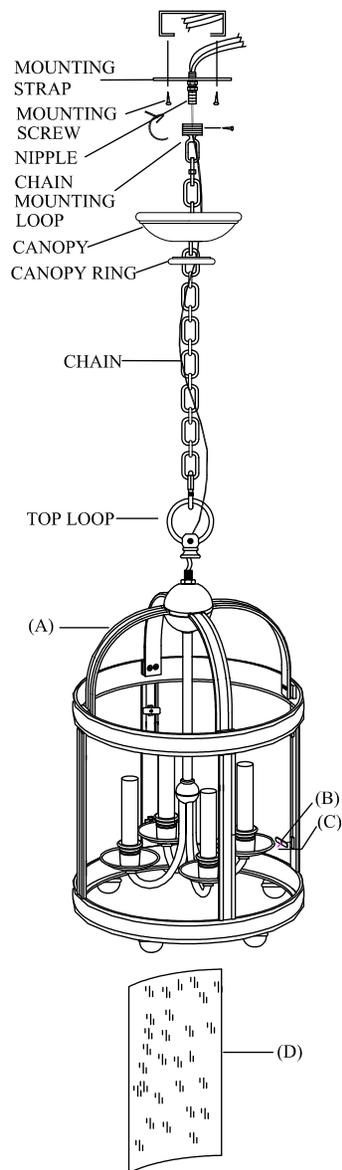

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. To install the glass panel to each section on lantern box (A), removing all metal tabs (B) by unscrewing set screws (C) and set aside. Insert a glass panel (D) into one frame and insert second glass panel (D) into next frame, replace metal tabs (B) and followed with set screws to secure glass panels to the frame.
2. Insert the third glass panel (D) into the next frame, secure with metal tabs (B) and set screws (C). Repeat the same procedure for the rest of glass panel.
3. Screw top loop onto top rod of lantern box and tighten the set screw at side of top loop until tight.
4. Feed wire through chain and mounting loop.
5. Unscrewing the canopy ring from chain mounting loop and slide canopy and canopy ring on chain.
6. Attach mounting strap to mounting outlet box and secure with mounting screws.
7. Insert top thread nipple in mounting strap and thread one of hex nut to the top of nipple until tight.
8. Attach chain mounting loop to thread nipple using the ceiling loop screw. Thread another hex nut to the end of nipple until tight.
9. Attach chain with fixture to chain mounting loop at desired height.
10. Attach the ground wire (silver or brass in color) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. It is imperative that the outlet box in your home be properly grounded. Be sure no wire strands are exposed.
11. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
12. Tuck wire connection neatly into ceiling outlet box.
13. Slip canopy to ceiling and secure with threaded canopy ring. Insert light bulbs into the sockets.