

ASSEMBLY INSTRUCTIONS

George II Double Sconce


Item # CHD1155

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**


INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

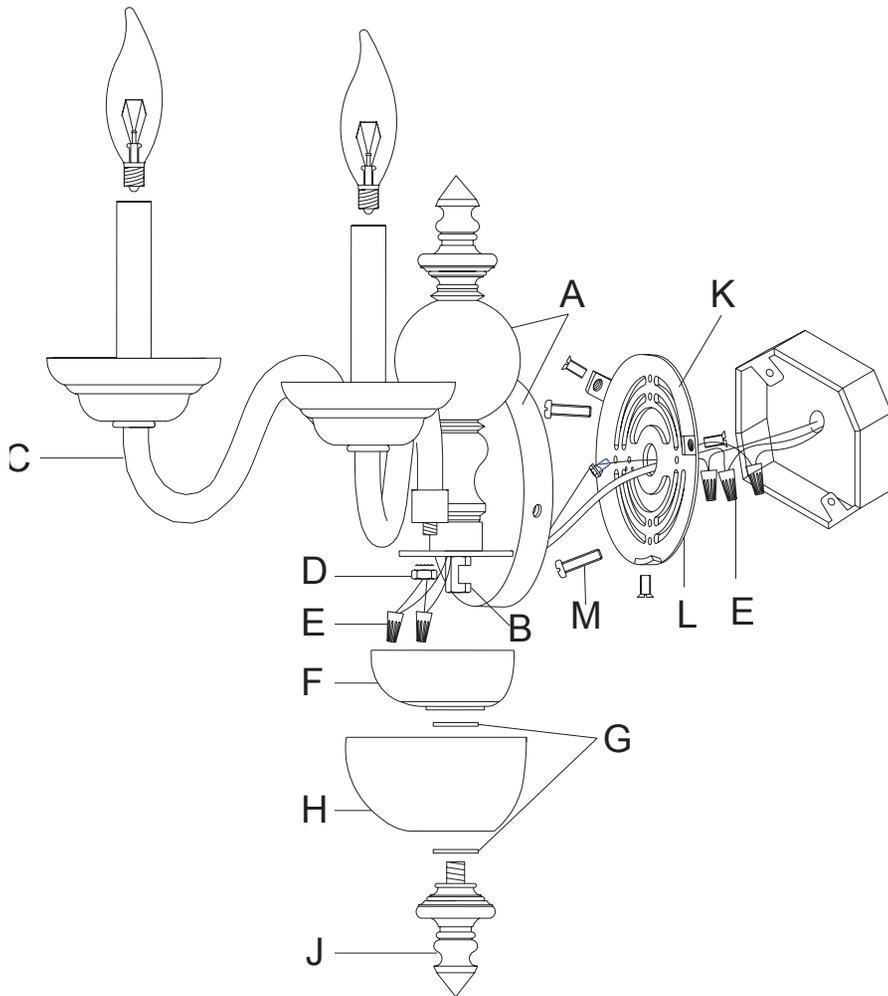

1. Carefully unwrap the sconce arms (C) and remove the retainer nut and washer (D).
2. Install the sconce arm by slipping the clear power cords through the hole in the bracket and secure using the washer and retainer nut (D). Use an adjustable wrench to tighten.
DO NOT OVER-TIGHTEN.
3. The sconce arm has two wire leads coming from it. One is marked with black tape and the other is not.
4. We have supplied two power supply leads – one black, one white.
5. Connect the wire marked with the black tape to the black lead wire using the supplied wire connector (E) and wrap with electrical tape.
6. Connect the unmarked wire to the white lead wire using the supplied wire connector (E) and wrap with electrical tape.
7. Place the metal bowl (F) into place, being careful not to catch the wires between.
8. Place a clear rubber spacer (G) between the metal bowl (F) and the glass bowl (H) and raise the glass bowl (H) into place.
9. Place another rubber spacer (G) between the glass bowl (H) and the finial (J).
10. Secure the glass bowl (H) into place by turning the finial (J) clockwise.
DO NOT OVER-TIGHTEN.

ASSEMBLY INSTRUCTIONS

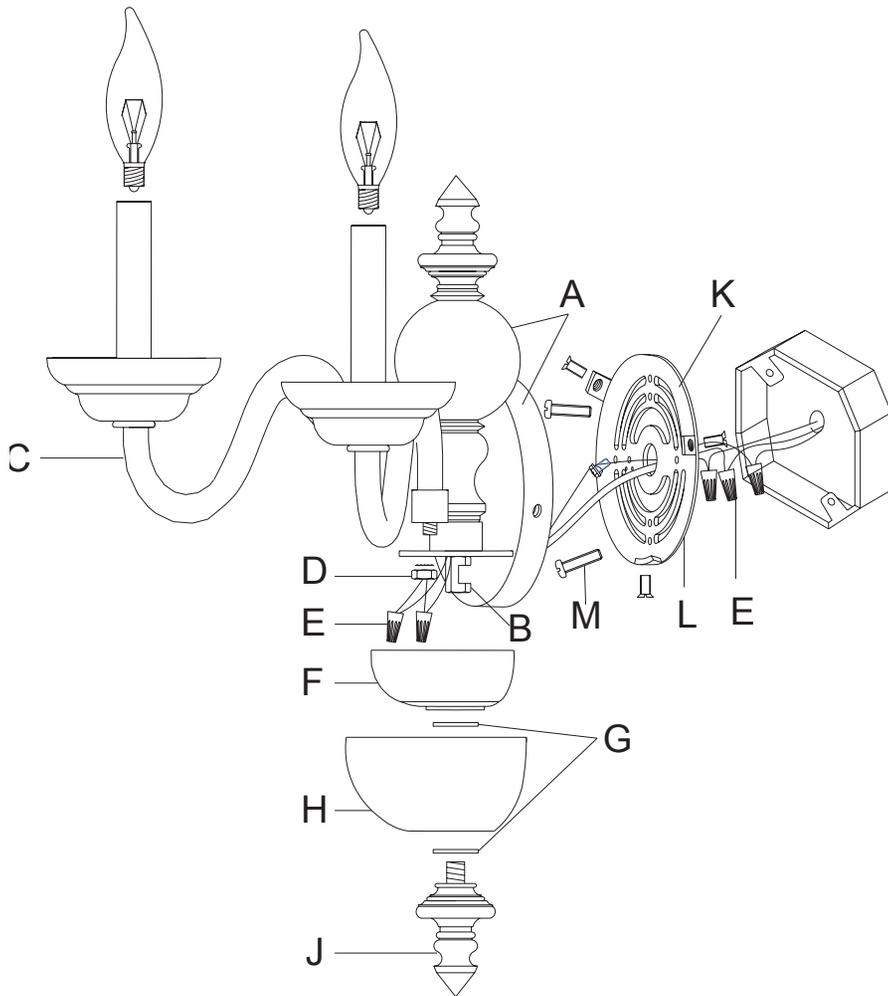

George II Double Sconce

Item # CHD1155

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

11. Remove the mounting plate (K) from the back plate by removing the three mounting plate screws (L).
12. Secure the mounting plate (K) to the junction box in your wall using two wall screws (M).
13. While holding the sconce body assembly, connect the white (neutral) wire from the fixture to the neutral (usually white) supply wire in your junction box using a wire nut (E) and wrap with electrical tape.
14. Connect the black (hot) wire from the fixture to the hot (usually black) wire in your junction box using a wire nut (E) and wrap with electrical tape.
15. Connect the green (ground) wire from the fixture to the ground (usually green or bare) in your junction box using a wire nut (E).
16. Carefully tuck the wires inside the junction box while lifting the backplate of the sconce body assembly over the mounting plate (K).
17. Secure into place using the three side screws(L).
18. Insert bulb (not included) into socket.
19. Restore power to outlet box and test fixture.
20. Installation is complete.



VISUAL COMFORT & Co.