

ASSEMBLY INSTRUCTIONS

George II Single Sconce


Item # CHD1156

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

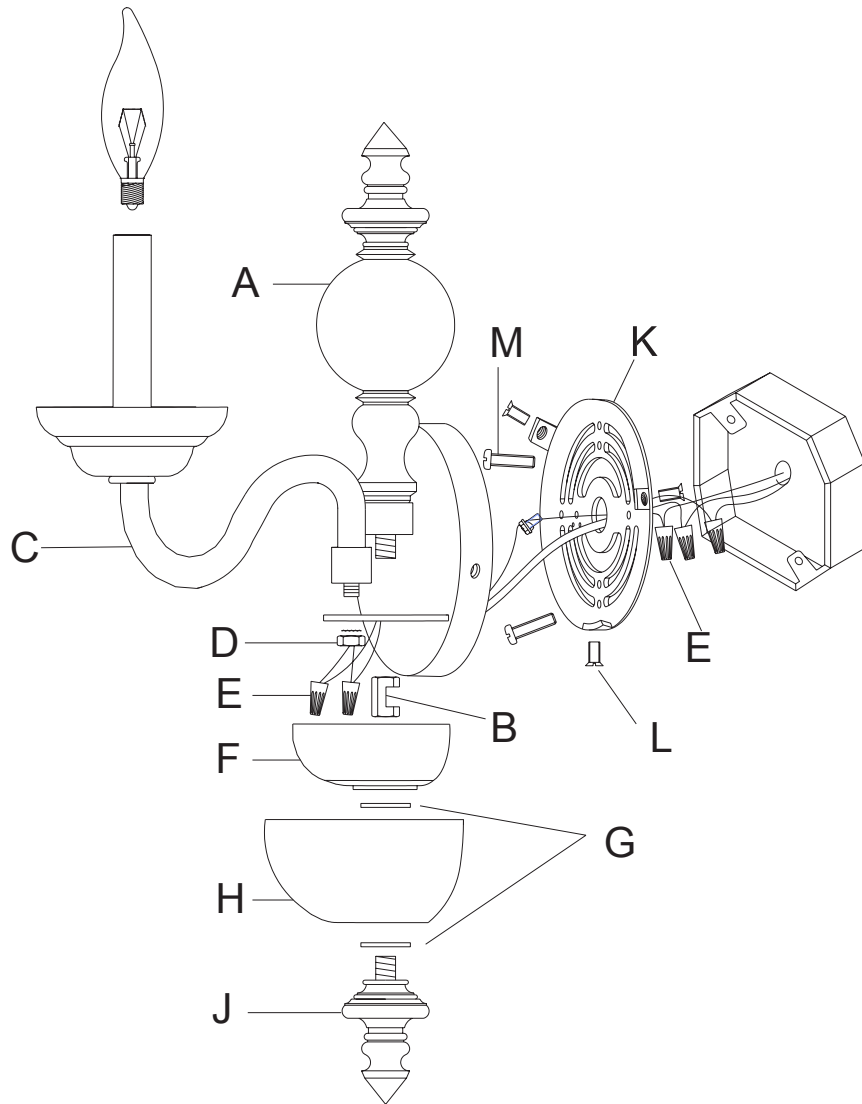

12. Remove the mounting plate (K) from the back plate by removing the three mounting plate screws (L).
13. Secure the mounting plate (K) to the junction box in your wall using two wall screws (M).
14. While holding the sconce body assembly, connect the white (neutral) wire from the fixture to the neutral (usually white) supply wire in your junction box using a wire nut (E) and wrap with electrical tape.
15. Connect the black (hot) wire from the fixture to the hot (usually black) wire in your junction box using a wire nut (E) and wrap with electrical tape.
16. Connect the green (ground) wire from the fixture to the ground (usually green or bare) in your junction box using a wire nut (E).
17. Carefully tuck the wires inside the junction box while lifting the backplate of the sconce body assembly over the mounting plate (K).
18. Secure into place using the three side screws(L).
19. Insert bulb (not included) into socket.
20. Restore power to outlet box and test fixture.
21. Installation is complete.



VISUAL COMFORT & Co.