


ASSEMBLY INSTRUCTIONS

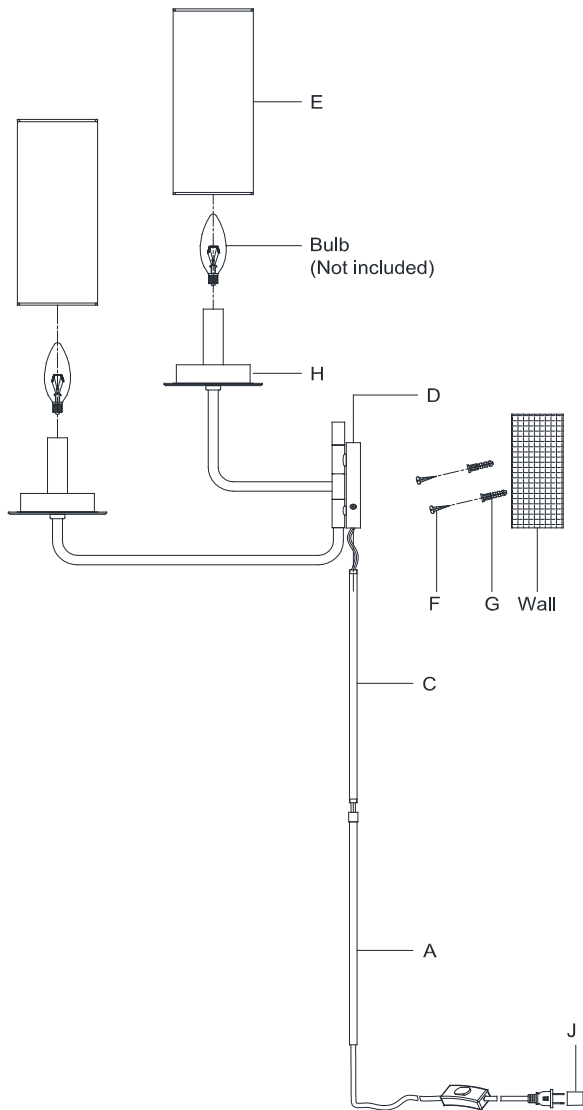

Larabee Dot Double Swing Arm Sconce

Item # KS 2036

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Assembled stem (C) and stem (A) together.
3. Thread the assembled stem (C) to the backplate (D).
4. Drill 2 holes on the wall and make sure the hole distance will match to the backplate (D) holes exactly.
5. Knock the anchors (G) into the wall holes.
6. Attach the screws (F) into the anchors (G).
7. Hang the backplate (D) to the screws (F).
8. Insert bulbs (not included) into the sockets.
9. Place the shade (E) to the bobèche (H).
10. Remove the plug cover (J) from the plug.
11. Plug into a proper electrical outlet and test the fixture.
12. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



VISUAL COMFORT & Co. Est. 1987