


ASSEMBLY INSTRUCTIONS

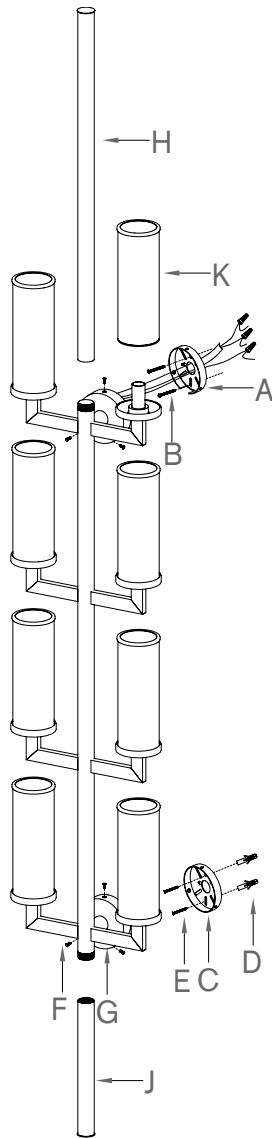

Liaison Statement Sconce

Item # KW2204

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.


WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Remove mounting plate (A) & (C) from fixture bases (G) by removing base screws (F) in counter-clockwise direction.
2. Affix mounting plate (A) to wall outlet box with mounting screws (B) provided.
3. Place the fixture with lower base (G) to the affixed mounting plate (A), make sure both bases (A) & (C) are vertical to each other. Mark outer line on the wall for the lower base (G). Remove the fixture.
4. Place mounting plate (C) on the marked area. Mark two center points for the mounting slots of base (C). Remove mounting plate (C).
5. Drill small holes on the mark location, each hole should be big enough for plastic anchors (D). Push plastic anchors (D) into the holes.
6. Attach mounting plate (C) on the wall, make sure it is vertical with mounting plate (A) and inserting screws (E) to plastic anchors (D) to secure it on the wall.
7. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tighten wrap the wire connector with electrical tape, so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
8. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.

ASSEMBLY INSTRUCTIONS

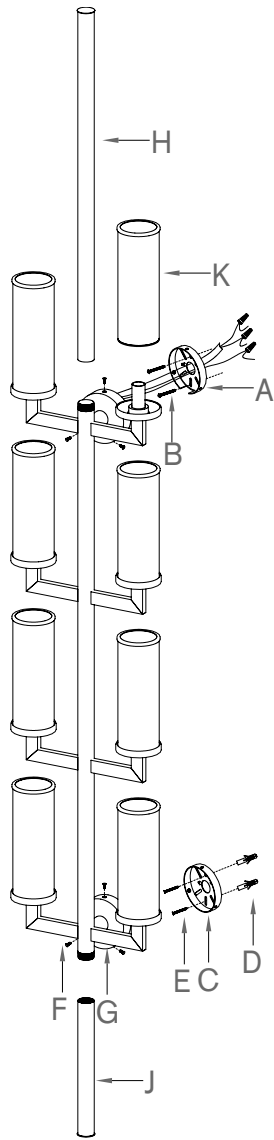

Liaison Statement Sconce

Item # KW2204

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

9. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS
OTHERWISE SAFETY WILL BE COMPROMISED.
10. Attach fixture bases(G) to the affixed mounting plate (A) & (C) and tighten with base screws (F).
11. Thread the long rod (H) onto the top opening of light fixture.
12. Thread the short rod (J) onto the bottom opening of light fixture.
13. Insert light bulbs (not included) Type C, maximum 60 watt into sockets.
14. Insert glass shades (K) into shade holder .

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.