


# RL19022

## ASSEMBLY & INSTALLATION GUIDE

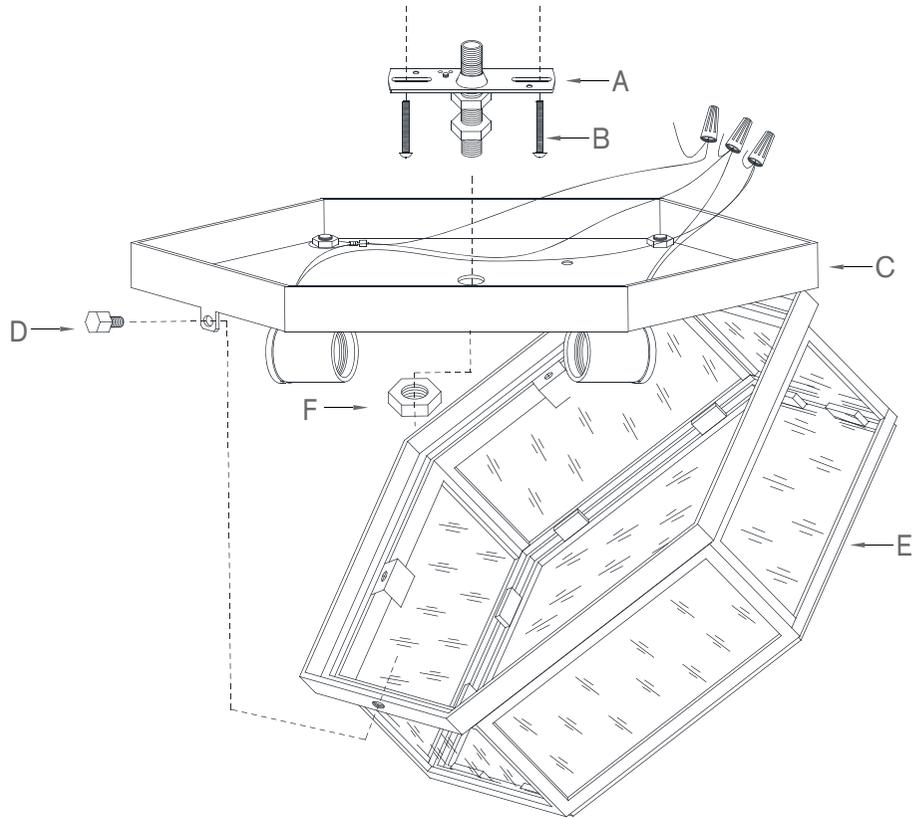

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Carefully remove all parts from the carton.
2. Remove the lantern box (E) from canopy base (C) by unscrewing set bolt (D).
3. Remove mounting strap (A) with nipple from canopy base (C) by unscrewing hex nut (F) and set aside.
4. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
5. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
6. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wires together with electrical tape.
7. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
8. Tuck the wire connections neatly into the ceiling outlet box.
9. Attach canopy base (C) to mounting strap (A), letting the rod on mounting plate (A) pass through the hole of canopy base (C) and secure with hex nut (F). Tighten with a wrench.
10. Insert light bulbs into sockets.
11. Close the lantern box (E) to the canopy base (C) and secure with set bolt (D).
12. Restore power and test fixture.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.