


# RL2027 ASSEMBLY & INSTALLATION GUIDE

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

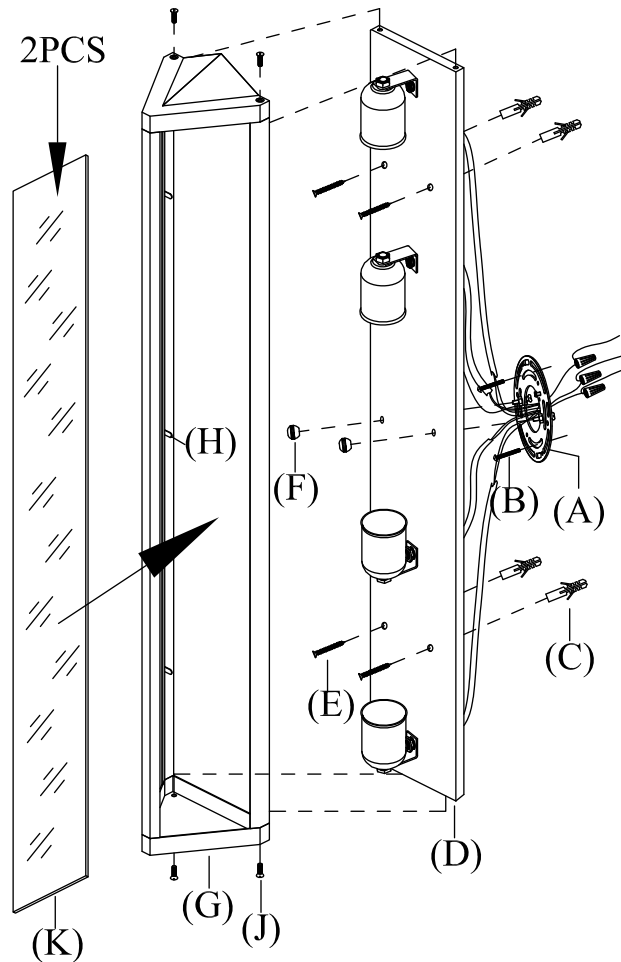

1. Carefully remove all parts from the carton.
2. Remove lantern box (G) from fixture base (D) by removing base screws (J).
3. Remove mounting plate (A) from fixture base (D) by removing cap nuts (F).
4. Place fixture base (D) on the wall outlet box, use as a template, mark points for four mounting holes of fixture base (D) on the wall. Remove fixture base (D).
5. Drill small holes on the marked points, the holes should be big enough to accommodate with plastic anchors (C). Push plastic anchors (C) into the holes.
6. Place mounting plate (A) to wall outlet box and secure with mounting screws (B) provided.
7. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
8. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
9. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
10. Place fixture base (D) to mounting plate (A), letting the rod on mounting plate (A) pass through the holes on fixture base (D), secure with cap nuts (F) and inserting screws (E) to the plastic anchors (C) to secure fixture base (D) to mounting plate (A).
11. Insert light bulbs into sockets.
12. To insert glass panels (K) provided to each frame, make sure metal tabs (H) are flipped against the opening of frame. Place glass panels (K) to each frame and secure glass panels by bending back metal tabs (H) downwards.
13. Attach lantern box (G) to fixture base (D) and tighten with base screws (J).

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.