


ASSEMBLY INSTRUCTIONS

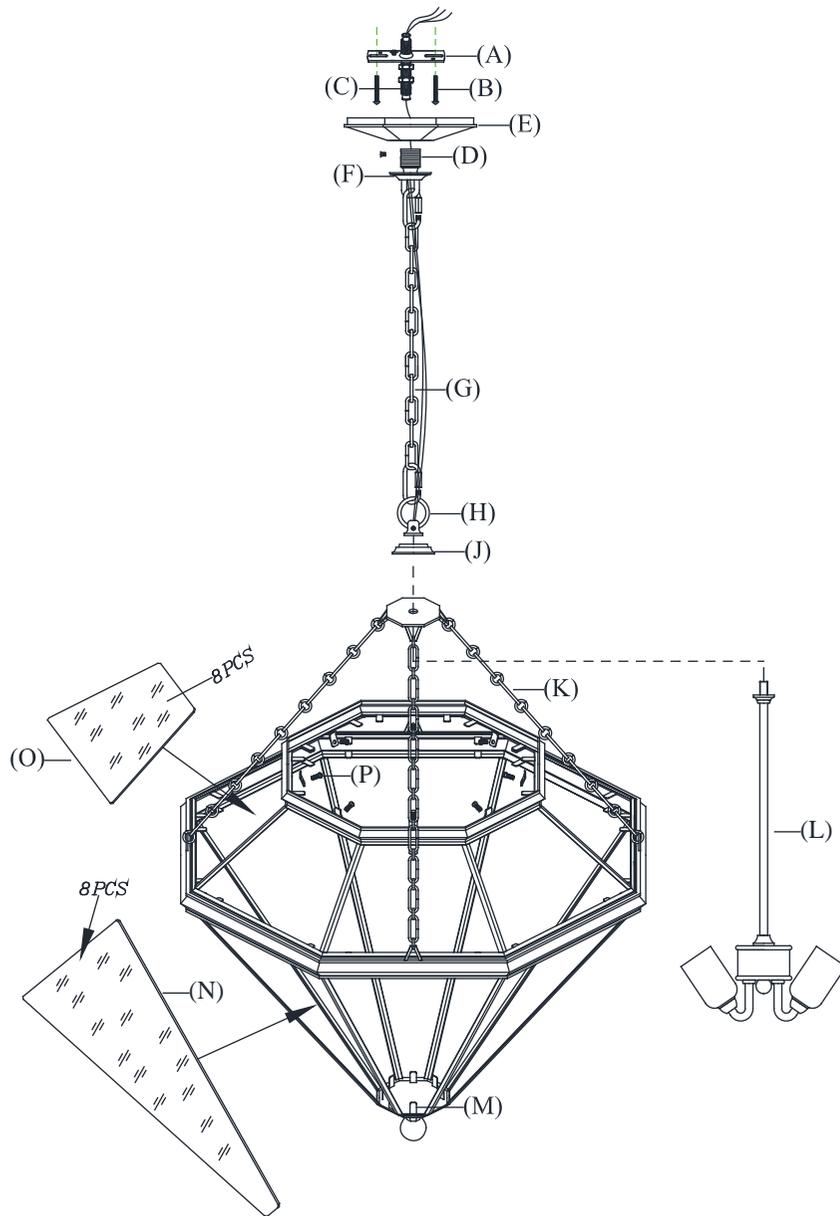

Cannes Pendant

Item # RL5060

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. To install glass panels (N) provided to each frame, make sure metal tabs (M) are flipped against opening of the frame. Place glass panels (N) to each frame, secure the glass panels (N) by bending back the metal (M) tabs towards the glass panels (N).
2. Repeat step 2 to install glass panels (O) and secure by tighten set screws (P).
3. Attach assembly part (L) and lantern box (K) pass through the hole of (J) to bottom of top loop (H). Tighten by hand.
4. Attach chain (G) to top loop (H) on lantern box.
5. Feed wire through chain (G), chain mounting loop (D), canopy (E) and nipple (C).
6. Slide canopy (E) and canopy ring (F) on chain (G).
7. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
8. Insert top thread nipple (C) in mounting strap (A).
9. Attach chain mounting loop (D) to thread nipple (C).
10. Attach chain (G) with fixture to chain mounting loop (D) at desired height.
11. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
12. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.