

ASSEMBLY INSTRUCTIONS


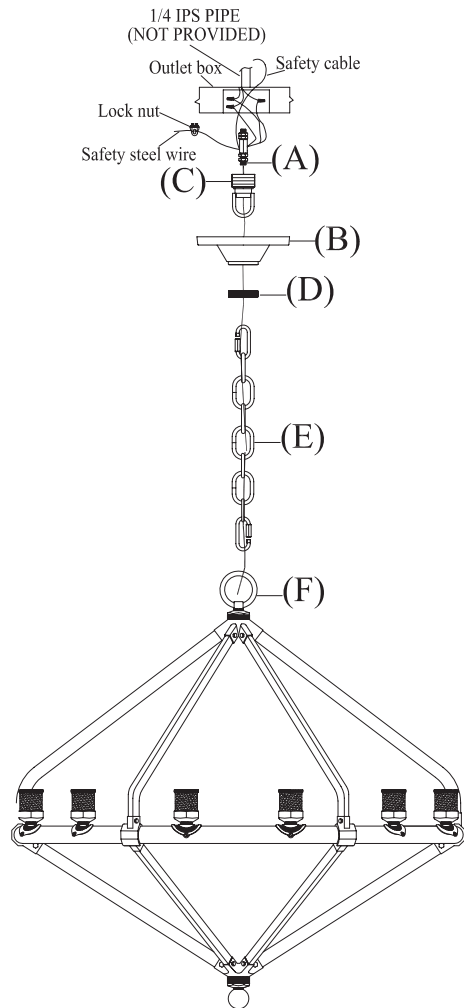


Illustration A:



To assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the lock nut (a).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

Archer Large Chandelier

Item # RL5196

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Attach chain (E) to top loop (F) on light fixture.
2. Feed the wire through chain (E), mounting loop (C) and nipple (A).
3. Unscrew canopy ring (D), slide canopy ring (D) and canopy (B) on chain (E).
4. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See Illustration A)
5. Attach mounting loop (C) to thread nipple (A) using the ceiling loop screw.
6. Open the end link of chain and screw chain mounting loop (C) to the nipple using screw and hook then chain (E) to mounting loop (C) by closing the end cut link.
7. Attach ground (bare wire) wire to ground wire from junction box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
8. Connect neutral wire from fixture (ridges molded wire) to neutral (usually white) wire from junction box. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
9. Connect hot wire from fixture (smooth wire) to hot wire (usually black) from the junction box. Fasten each together with plastic wire connector. Make sure no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.



RALPH LAUREN

ASSEMBLY INSTRUCTIONS


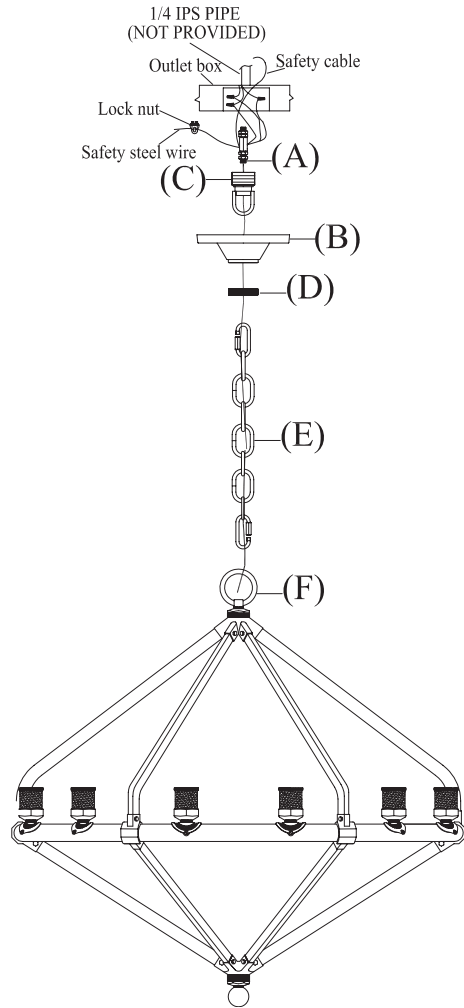


Illustration A:



To assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the lock nut (a).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

Archer Large Chandelier

Item # RL5196

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

10. Tuck wire connections neatly into ceiling outlet box.
11. Insert top thread nipple (A) in mounting 1/4 IPS pipe.
12. Slip canopy (B) to ceiling and secure with threaded canopy ring (D).
13. Insert light bulbs (not included) into sockets
14. Now installation is complete. Return power and test fixture.



RALPH LAUREN