


## ASSEMBLY INSTRUCTIONS

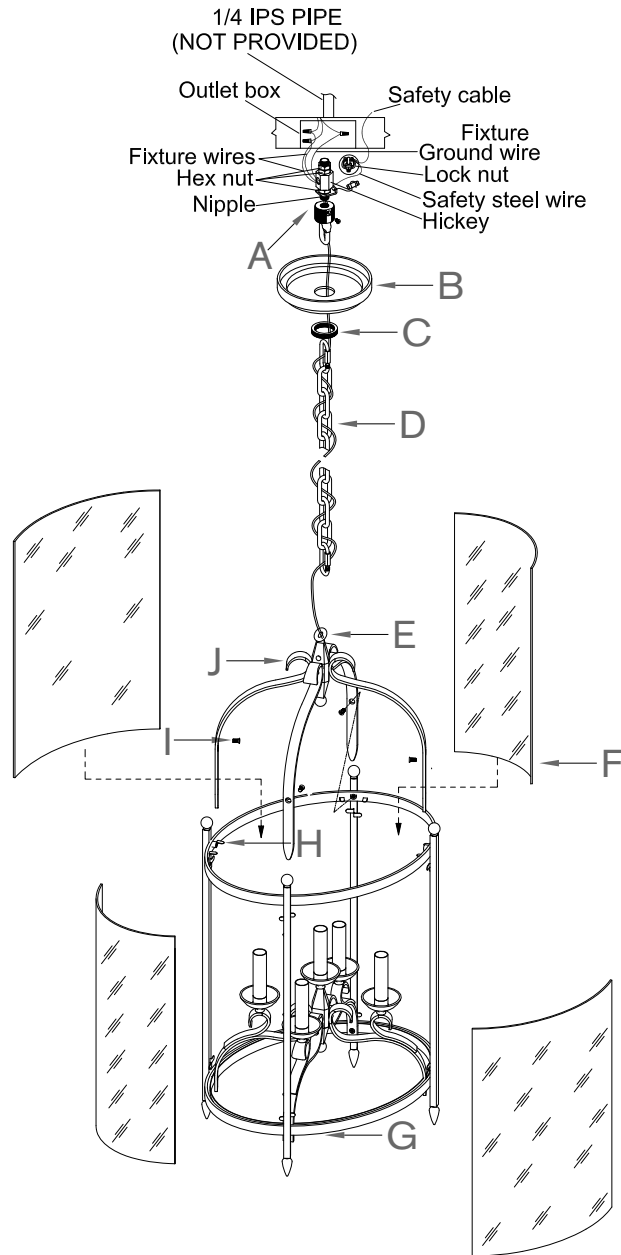

## Gillespie Medium Oval Lantern Item # S 5331

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Carefully remove all parts from the carton.
2. Provide a 1/4" IPS pipe with one end securely mounted to beam or a structural. The other end should protrude through the enter of the outlet box as shown.
3. Remove bracket (I) from top of cage (G) by removing set screws (J).
4. To install the glass panels (F) to each frame of cage (G), make sure the metal tabs (H) are flipped against the opening of frame. Place glass panels (F) to each frame of cage (G) and secure glass panels (D) by bending back metal tabs (H) downwards.
5. Replace bracket (I) to top of cage (G) and secure with set screws (J).
6. Attach chain (D) to top loop (E) by opening/closing end link of chain.
7. Attach chain (D) to mounting loop (A) by opening/closing end link of chain.
8. Unscrew canopy ring (C) and slide canopy ring (C) and canopy (B) on the chain (D).
9. Insert top threaded nipple in mounting 1/4 IPS pipe.
10. Lace the fixture wires, ground wires and safety cable through the chain and mounting loop (A), exiting through the side of hickey. Run the safety cable through the top of the outlet box and secure to structural member.
11. Attach fixture steel safety cable to structural member in the ceiling.
12. Attach the bare copper ground from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
13. Connect neutral wire from fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
14. Connect the hot wires from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE UNCOMPROMISED.
15. Tuck wire connections neatly into ceiling outlet box.
16. Slip canopy (B) to ceiling and secure with canopy ring (C).
17. Insert the specified light bulbs into sockets.
18. Restore power and test fixture. Installation is completed.

\*\*\* Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.