


ASSEMBLY INSTRUCTIONS

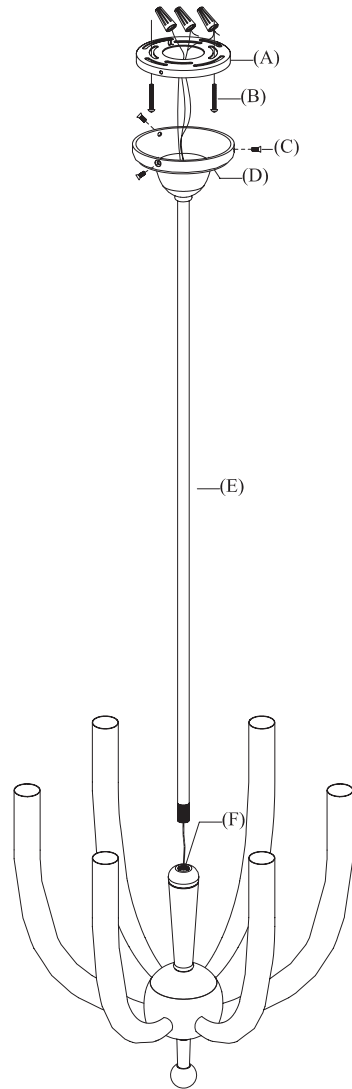

Horn Chandelier

Item # S5395

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Thread the bottom nipple of pole (E) into the center opening of light fixture (F).
2. Remove mounting plate (A) from fixture base (D) by unscrewing base screws (C). Gently pull the wires from the ceiling and allow the wires to hang. Thread the wires through the center hole in mounting plate (A).
3. Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (B).
4. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
5. Connect the neutral wire from the fixture (ridged molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
6. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
7. Attach fixture base (D) to the affixed mounting plate (A), align the holes on the side, insert base screws (C) into the holes to secure the fixture base (D) to the mounting plate (A).
8. Insert light bulbs (NOT INCLUDED) into the sockets.
9. Restore power and test fixture

