


ASSEMBLY INSTRUCTIONS

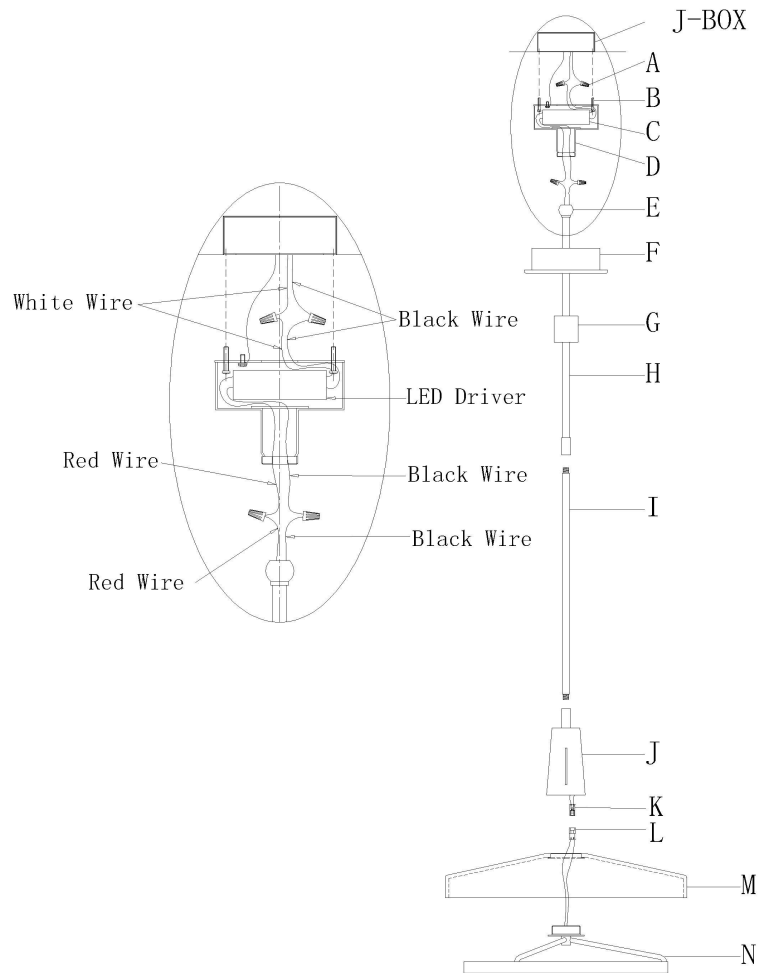

Nikos Medium Pendant

Item# TOB5194

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING.

RETAIN ALL PACKING MATERIAL UNTILL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Remove the mounting plate (D) from the canopy (F) by loosening collar ring(G).
3. Install the mounting plate(D) to the ceiling and secure with screw(B).Put the ground wire from J-box warp on the ground screw on mounting plate and secure. Put the LED driver(C) into the mounting plate(D).
4. Feed wire from LED spider(N) through the glass shader(M).
5. Install the plug(L) and (K) together. Tuck the wire connections neatly into the cover(J).
6. Install the cover(J) to the glass shade(M).
7. Feed wire from cover(J) through the rod(I),rod(H).
8. Thread the bottom nipple of rod(I) into cover(J),thread the rod(H) to the rod(I).
9. Slide the collar ring(G) and canopy(F) through down the rod(H).
10. Measure the wires and cut it to desired length. Be sure to be enough for connection to LED driver input supply wire.
11. Hook the swivel ball(E) to mounting loop for hanging the light fixture.
12. Connect the LED driver(C) output supply wire to the wires from the fixture body using a wire nut.
Please note red wire(+) to red wire, and black wire(-) to black wire.
13. Connect the LED driver(C) input supply wire Neutral wire(white) with the neutral wire(white) from the outlet box using a wire nut(A).Connect the LED driver input Hot(black)wire with the hot wire(black) from the outlet box using a wire nut(A).
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
14. Tuck the wire connections neatly into ceiling outlet box.
15. Slip canopy(F) to mounting plate(D) and secure with collar ring(G).
16. Installation is completed, turn on power at fuse or circuit breaker.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

