


ASSEMBLY INSTRUCTIONS

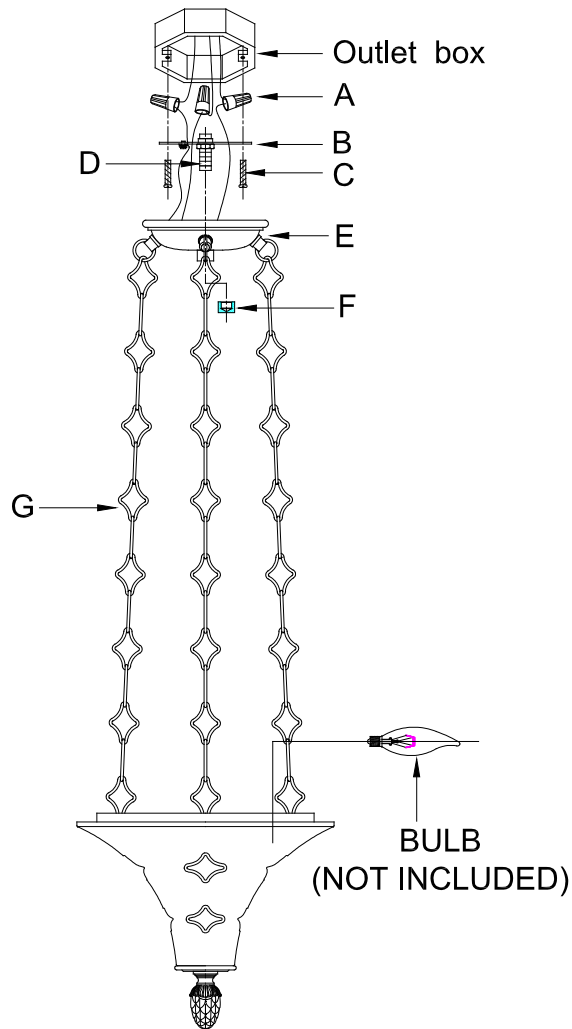

Callie Hanging Pendant

Item # SR5101

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Install the crossbar(B) with thread pipe (D) to outlet box by using mounting screws(C) provided.
2. Put canopy (E) to ceiling, and secure with lock collar(F).
3. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain(G).
4. When you reach the canopy, measure the wires and cut. Be certain to leave enough to connect inside the canopy.
5. Strip the insulation back on the two power supply wires about 5/8".
6. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from your ceiling box using wire nut(A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED. IT IS IMPERATIVE THAT THE J-BOX IN YOUR HOME BE PROPERLY GROUNDED.**
7. Connect the Neutral fixture wire with the Neutral (usually white) wire from your ceiling box using wire nut(A).
8. Connect the Hot (smooth edge, markings, or black) fixture wire with the Hot (usually black) wire from your outlet box using wire nut(A).
9. Put canopy(E) to ceiling, and secure with lock collar(F).
10. Install the light bulbs(not included) into sockets.
11. Installation is complete, turn on power at fuse or circuit breaker.

