

Wynter Linear Wall (LED)

700SWNT_

1.0



GENERAL PRODUCT INFORMATION:



This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.


This product is dimmable with a low-voltage electronic dimmer.

This product is suitable for wet locations.

This product may be installed vertically or horizontally.


CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.

Install the Fixture

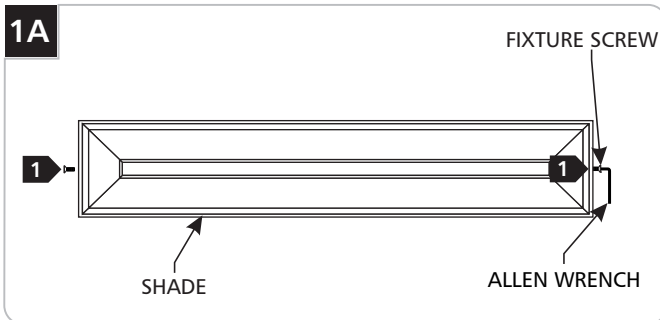


- 1** With the provided Allen wrench, remove the two fixture screws.
- 2** Separate the shade from the fixture base.

NOTE: If the mounting holes in the fixture base do not match the electrical box or plaster plate screw holes, install the universal mounting plate before wiring the fixture.

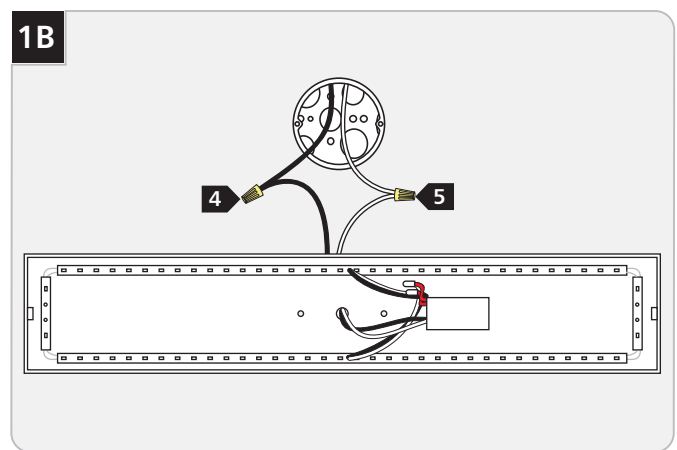


- 3** Connect the backplate to a suitable ground according to local electrical codes.
- 4** Connect the black driver wire to the hot power line wire with a wire nut.
- 5** Connect the white driver wire to the neutral power line wire with a wire nut.

1C

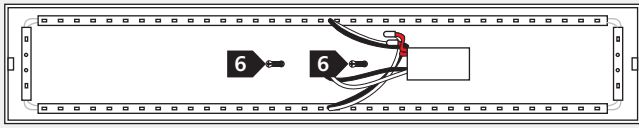

- 6 Mount the fixture base to the electrical box/universal mounting plate with two #8-32 screws.

1D

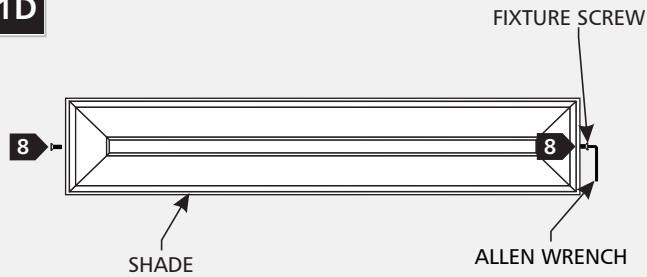

- 7 Re-install the shade to the fixture base.
- Secure the shade to the fixture base with the provided
- 8 Allen wrench.

1E



- 9 For wet location installation, caulk around the mounting base with waterproof construction sealant.

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2015 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company