


ASSEMBLY INSTRUCTIONS

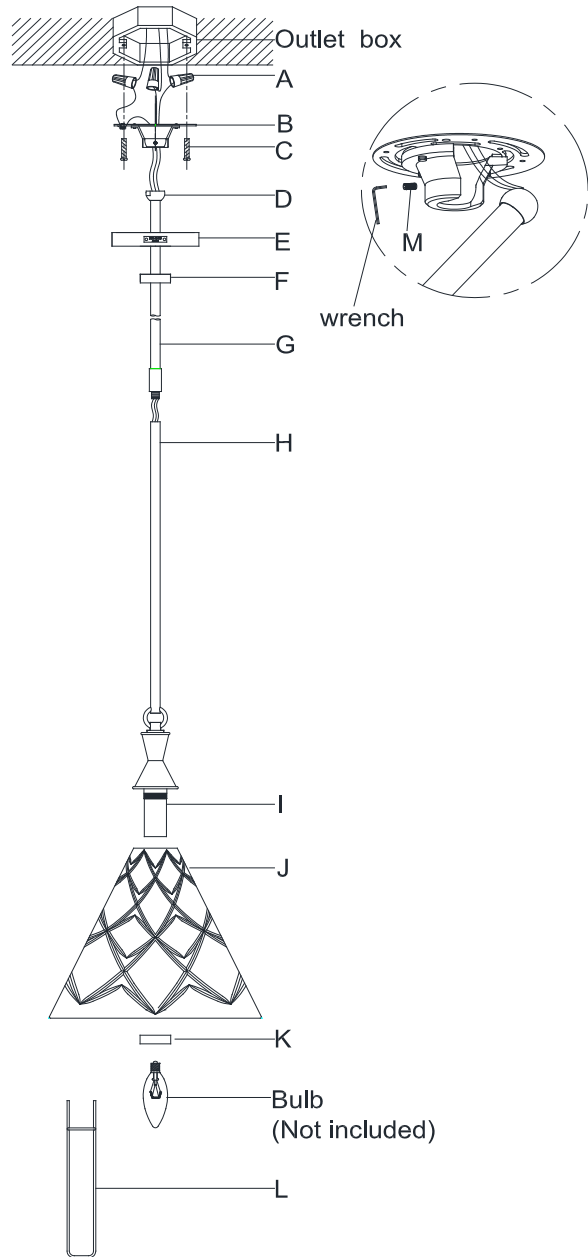

Darcy Medium Pendant

Item # KS 5305

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Attach the glass shade (J) to the socket cup (I) and secure with the socket ring (K) by using the tool (L).
3. Thread the tube (G) to the tube (H).
4. Let the canopy (E) and lock collar (F) pass through the tube (G).
5. Affix mounting plate (B) onto the outlet box and secure with mounting screws (C).
6. Hang the connector (D) to the center of mounting plate (B) and secure with set screw (M) by using the wrench provided.
7. Cut the cord and ground wire about 10" length beyond the canopy.
8. Attach the Ground wire from the fixture (green or bare copper) to the ground wire from the outlet box with plastic wire connector (A).
9. Connect the Hot wire from the fixture (smooth edge, markings) to the hot wire from the outlet box. Fasten them together with a plastic wire connector (A).
10. Repeat this procedure for the Neutral wire from the fixture (ribbed, no markings) to the neutral wire from the outlet box.
11. Twist the wire connections neatly into the outlet box.
12. Attach canopy (E) to mounting plate (B), and secure with lock collar (F).
13. Insert bulb (not included) into the socket.
14. Installation is complete, turn on power at fuse or circuit breaker.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

VISUAL COMFORT & Co. Est. 1987