


## ASSEMBLY INSTRUCTIONS

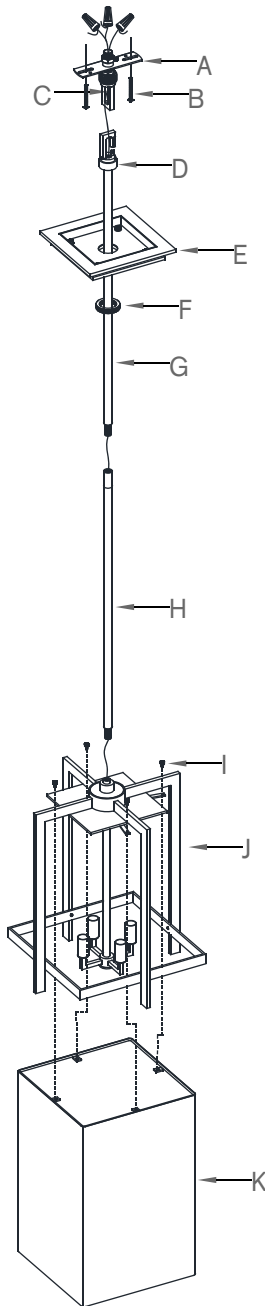

### Milo Medium Pendant Item # S 5323

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Carefully remove all parts from the carton.
2. Feed wire through the inner rods of pole (H) and (G).
3. Thread the bottom of pole (H) into the joint on center of light fixture (J) by turning in a clockwise direction.
4. Thread the bottom nipple of pole (G) into the top opening of pole (H) by turning in a clockwise direction.
5. Affix mounting plate (A) to ceiling outlet box with mounting screws (B) provided.
6. Unscrew canopy ring (F), slide canopy ring (F) and canopy (E) on pole (G).
7. Hook the hanging loop (D) to mounting loop (C).
8. Attach the bare copper ground wire from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
9. Connect neutral wire from fixture (ribbed molded wire) to the neutral wire from the junction box (usually white). Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
10. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten both wires together with a plastic wire connector and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
11. Tuck wire connections neatly into ceiling outlet box.
12. Attach canopy (E) to the affixed mounting plate (A) and secure with canopy ring (F).
13. Insert light bulbs (not included) into sockets.
14. Remove set screws (I) from the light fixture (J), attach shade (K) to the light fixture (J) by aligning the holes on shade (K) with holes on light fixture (J) and secure with set screws (I).
15. Installation is complete. Restore power and test fixture.

\*\*\* Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.